

10 TON POSITIVE SAFETY GROUND RELEASE SHACKLE

To Attach Shackle to Pile:

- Pull Trip Pin(A) to unlock the Plunger Pin(B) and retract Plunger Pin(B).
- Release Trip Pin(A) and retract Plunger Pin(B) until latched in open position.
- Align shackle Pin with lifting hole in top of pile (**Figure 1**). With Shackle Pin aligned with pile lifting hole, pull Trip Pin(A) to release the Plunger (B) and extend through the pile (**Figure 2**).
- Ensure pin is fully extended through pile. Do not lift pile if pin is not fully extended and engaged. (See **figure 3 on page 2.**)

To Release Shackle from Pile:

- Pull Trip Pin(A) to unlock the Plunger Pin(B) and retract Plunger Pin(B).
- While holding Plunger Pin(B) release Trip Pin(A) and fully retract Plunger Pin(B) until locked in open position.
- The spring-loaded Trip Pin(A) will latch Plunger Pin(B) in the open position.

STAB CAT INC.

Positive 2-rope latch system

2

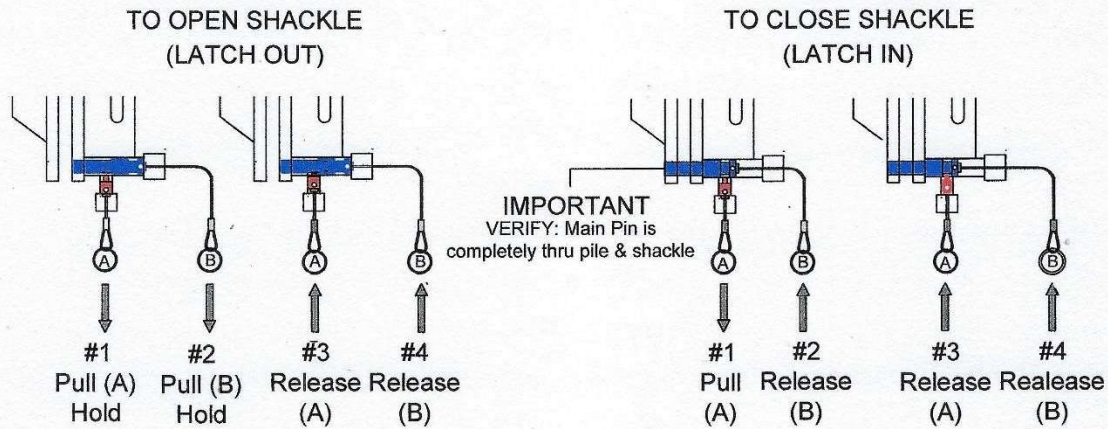


Figure 1:



Figure 2:



Figure 3:

Safety Notes & Warnings:

- When shackle operator/rigger is attaching shackle, ALWAYS ensure that shackle is fully extended and engaged through pile. (As shown in Figure 3)
- Under no circumstances are the shackles to be used while Vibro or Impact Hammer is activated. Use of Vibro or Impact hammer with shackles attached will result in damage to shackles.
- User must not use ropes as 'Tag Lines' under any circumstance. Full attention by the User must be given to both ropes attached to the Trip Lanyard(A) and the Plunger Lanyard(B) at all times to prevent them from becoming 'fouled' and/or 'snagged'.
- DO NOT SHOCK LOAD. If shackle has been shock loaded, it must be inspected by STAB CAT before repairs can be performed and sent for recertification by third party load testing.
- All shackles are individually proof tested to twice the safe working load and certificated by third party.
- Prototype shackles tested to five times safe working load.